
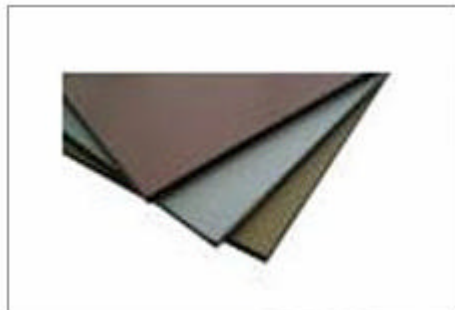
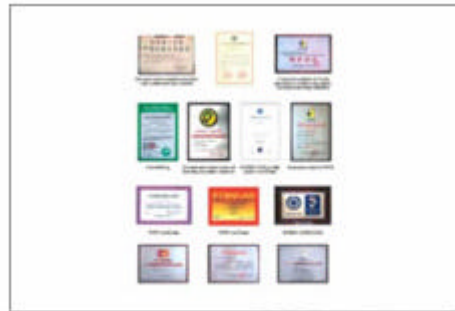


Fireproof Aluminum Composite Panel Manufacturer, Fireproof Aluminum Composite Panel Supplier, Fireproof Aluminum Composite Panel Factory, Fireproof Aluminum Composite Panel Exporter in china.

## [Fireproof Aluminum Composite Panel](#)

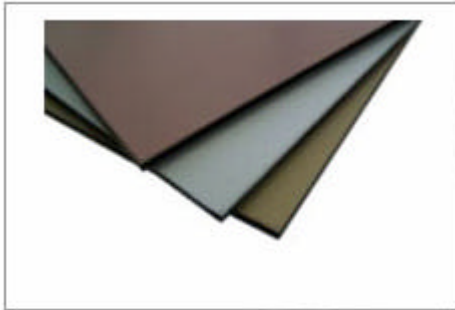

### Detailed Product Description

|                 |       |
|-----------------|-------|
| Product Origin: | China |
|-----------------|-------|

|                     |   |
|---------------------|---|
| Name:               | Sanxing Darren, Gangji, San'ai                |
| Price Terms:        | FOB, CIF, CFR                                 |
| Payment Terms:      | T/T or L/C at sight                           |
| Supply Ability:     | 300,000sqm/month                              |
| Minimum Order:      | 1 x 20' FCL                                   |
| Delivery Lead Time: | 20 days after receiving deposit of T/T or L/C |
| Certification(s):   | ASTM, FIREPROOF CERTIFICATE                   |

[See the most recent posting](#) for this **Aluminum Composite Panel** (Apr 23, 2007)

### Detailed Product Description

#### Materials:

- 1) Front side: aluminum roll coated with PVDF or polyester
- 2) Core: plastic fireproof materials
- 3) Rear side: aluminum coated with polyester

#### Specifications:

- 1) Aluminum sheet thickness:

- a) 0.50 x 0.50mm
- b) 0.45 x 0.45mm
- c) 0.40 x 0.40mm
- d) 0.35 x 0.35mm
- e) 0.30 x 0.30mm
- f) 0.25 x 0.25mm
- g) 0.21 x 0.21mm
- h) 0.18 x 0.18mm
- i) 0.15 x 0.15mm
- j) 0.12 x 0.12mm
- k) 0.10 x 0.10mm

- 2) Panel thickness: 2mm, 3mm, 4mm, 5mm, 6mm
- 3) Dimensions:
  - a) Width: 1220mm, 1250mm, 1550mm
  - b) Length: 2440mm, upon customers' request
- 4) Standard size (width x length x thickness):
  - a) 1220 x 2440 x 3mm
  - b) 1220 x 2440 x 4mm
  - c) 1220 x 2440 x 5mm
  - d) 1220 x 2440 x 6mm
- 5) Normal color: 10 kinds
- 6) Non-standard sizes and special colors are available according to customers' requests

**Characteristics:**

- 1) Excellent fireproof property
- 2) Super peeling strength
- 3) Perfect cold resistance performance
- 4) Excellent surface flatness and smoothness
- 5) Superior weather, corrosion, pollutant resistance
- 6) Even coating, various colors
- 7) Superior impact resistance
- 8) Lightweight and easy to process
- 9) Easy to maintain

**Application scope:**

- 1) Gas piping, cables, building materials, etc (this product fills a gap in the domestic construction materials field, with performance indexes superior to panels manufactured overseas)

- 2) Curtain wall decoration for buildings where security is important, as airports, hospitals and research centers
- 3) Curtain wallboards for outside walls of normal buildings
- 4) Renovations for old buildings and movable houses
- 5) Reformation and decoration for indoor walls, ceilings, bathrooms, kitchens and balconies
- 6) Facades
- 7) Billboards, exhibition desks and notice boards
- 8) Wallboards and ceilings for tunnels
- 9) Materials for industrial application, car and ship bodies

Packing: Wooden pallet or bulk

## **Contact us**

ADD: NO.168, Donghui Road, Part B of Zhenhai Economic Developing Zone, Ningbo

P. C. : 315221

TEL: 86-574-26267777

SERVICE: +86-574-26267575

FAX: +86-574-26268800

E-MAIL: [sales@nbhongshan.com](mailto:sales@nbhongshan.com) [redfir@nbhongshan.com](mailto:redfir@nbhongshan.com)

HTTP: [www.nbhongshan.cn](http://www.nbhongshan.cn) [www.nbhongshan.com](http://www.nbhongshan.com)